



SIC6146E

LF FDX transponder at 125 kHz field frequency with built-in 48-bit encryption (H2E) REV 1.0

Features Summary

Highlight Features

- Security transponder for the immobilization applications
- Low-frequency FDX technology at 125 kHz field frequency
- Authentication based on H2E crypto algorithm (48-bit secret key)
- Qualified AEC-Q100 Grade 3

Interface and Peripheral

- ASK downlink and uplink data transmission
- Manchester and Bi-Phase data coding with RF/32 data rate
- Fully compatible with H2E command sets and protocols
- ID46E transponder family replacement

Memory

- 32-bit unique device identification
- 48-bit secret key for encrypted authentication
- 8-bit transponder configuration
- 3,712-bit user memory
- 100,000 erase/write cycles
- 20 years of non-volatile data retention

Operating Conditions

- Carrier frequency f_c is 125 kHz
- Operating temperature: -40°C to 85°C

Package

- Wedge Transponder

Applications

- Immobilizer Key
- Access Control
- Industrial

Revision History

Revision	Date	Description	Change/Update Comment
1.0	1 July 2025	Release	1 st Release

Ordering information

Part No.	Description	Package	Marking
PAUDW103EP0SU46EGC3	SIC6146-EG Immobilizer LF FDX with H2E 48-bit encryption Wedge 125 kHz, Canister, RFID TAG	Wedge	-

The information herein is for product information purpose. While the contents in this publication have been carefully checked; no responsibility, however, is assumed for inaccuracies. Silicon Craft Technology PLC. reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability.

Contents

0.	Notation.....	7
0.1	Styles and Fonts for key words.....	7
0.2	Abbreviation	8
1.	Functional Overview	9
1.1	Details Block Diagram.....	9
1.2	Block Component Description	10
1.2.1	Analog Front End (AFE).....	10
1.2.2	Digital controller and memory	10
2.	Specification	11
2.1	Absolute Maximum Rating	11
2.2	Electrical Characteristic	11
3.	Memory organization	12
3.1	EEPROM Organization	12
4.	Communication.....	13
4.1	Initialization Phase (Base Station to Transponder).....	13
4.2	Downlink Phase (Base Station to Transponder)	13
4.3	Uplink Phase (Transponder to Base Station)	14
5.	Package information	15
5.1	Wedge transponder	15
5.1.1	Wedge dimension	15
6.	Packing Specification.....	16
7.	Disclaimer.....	17

List of Figures

Figure 1-1: SIC6146E block diagram	9
Figure 3-1: Memory Structure	12
Figure 4-1: RF protocol of base station to transponder	13
Figure 4-2: RF protocol of the transponder to the base station.....	14
Figure 5-1: Wedge Drawing and dimension	15
Figure 6-1: Product packing	16
Figure 6-2: Inner box dimension	16
Figure 6-3: Outer box dimension	16

List of Tables

Table 0-1: Style and Fonts key word	7
Table 0-2: Abbreviation	8
Table 2-1: Absolute Maximum Rating	11
Table 2-2: AFE Characteristic	11
Table 2-3: EEPROM Characteristic	11
Table 2-4: Environment and Data Reliability	11
Table 4-1: Downlink timing characteristic	13
Table 4-2: Uplink timing characteristic	14
Table 6-1: Canister information	16
Table 6-2: Inner box information	16
Table 6-3: Outer box standard packing information	16

0. Notation

0.1 Styles and Fonts for key words

This part defines styles and fonts used for the key words throughout this document. The key words are names of signal, register, pin, state of operation and command. The styles, fonts, and their indications are shown in Table 0-1.

Table 0-1: Style and Fonts key word

Symbol	Indication
<i>Signal</i>	Signal name
Register	Register name or Bit name
pin RX	Pin name
<i>"State of Operation"</i>	State of operation
Command	Command name for RF interface
"Flag"	Flag name in response state

- To refer to a register address and a value in a register, a hexadecimal number proceeding with letter "0x" is used, for example 0x0A.
- To refer to a bit located in a register address, a symbol "." following by a number reflecting the bit location starting from 0 to 7 is used. For example, 0x0A.0 refers to bit 0, least significant bit, in the register 0x0A.
- To refer to a set of consecutive bits located in a register address, a format ".[msb:lsb]" is used after a register value. For example, a value of 0x0A.[3:0] refers to bit 3, 2, 1, and 0 in the register 0x0A.
- To refer to a binary value in some registers, the letter "b" is placed at the end of the binary number, for example "1010b".
- To refer to logic level, the number in single quote '1' and '0' are used to refer to binary logic level.

0.2 Abbreviation

Table 0-2: Abbreviation

Abbreviation	Term
AFE	Analog Front end
ASK	Amplitude shift keying
CMD	Command
CRC	Cyclic redundancy check
EEPROM	Electrically Erasable Programmable Read-Only Memory
FDX	Full Duplex
Lock	Permanently disable memory programming
LSB	Least significant bit
MSB	Most significant bit
POR	Power on Reset
RF	Radio Frequency
Rx	Receiver
Tx	Transmitter
TM	Transponder memory
XM	Extended user memory
CM	Configuration memory

1. Functional Overview

The SIC6146E transponder can perform a secure contactless authentication, featuring two types of authentication approaches: Password mode and Encrypt mode.

In password mode, the transponder and the base station exchange its password with each other before starting a communication. The encrypt mode uses a secured encryption algorithm with a secret key and a random number for creating an encrypted communication between the base station and the transponder.

1.1 Details Block Diagram

The SIC6146E block diagram consists of two parts:

- RF Analog Front End (RF-AFE)
- Digital Controller and Memory

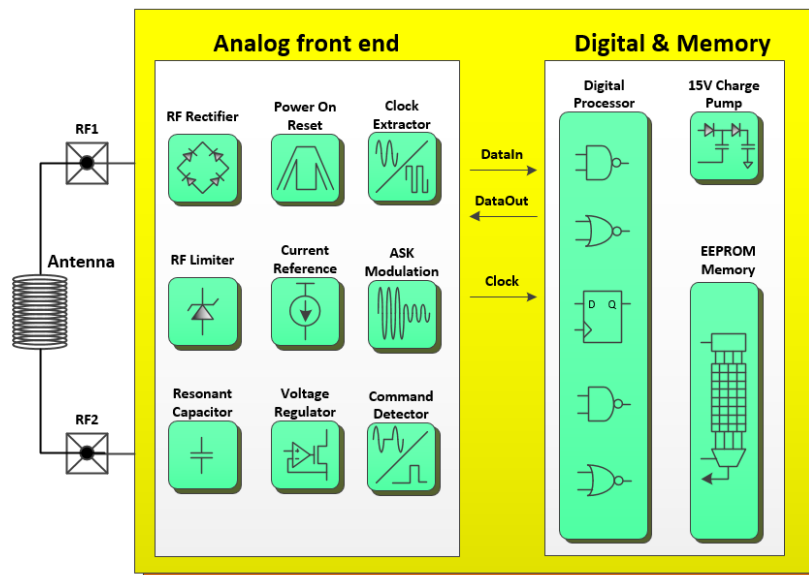


Figure 1-1: SIC6146E block diagram

1.2 Block Component Description

1.2.1 Analog Front End (AFE)

The Analog Front end (AFE) has RF1 and RF2 terminals for connecting to an external antenna. It harvests energy from the induced RF signal in the antenna to supply the internal circuit. The AFE also provides facilities for RF communication such as a modulator for uplink data communication, a demodulator for downlink data communication, a power-on-reset module, and a clock extractor for data synchronization.

1.2.2 Digital controller and memory

The digital controller controls data transactions between the AFE and the EEPROM. The digital controller handles the following operations:

- Decoding incoming RF downlink commands and encoding RF uplink data/response
- Reading and programming data from/to the EEPROM
- Process authentication using an encryption module

2. Specification

2.1 Absolute Maximum Rating

Conditions above the listed maximum ratings may cause permanent damage to the device. Exposure to the absolute maximum rating conditions for an extended period may affect the device reliability. Only one absolute maximum rating can be applied at a time.

Table 2-1: Absolute Maximum Rating

Parameter	Rating
Operating temperature range	-40 °C to +85 °C
Programming temperature range	-40 °C to +85 °C
Storage temperature range	-40 °C to +125 °C

2.2 Electrical Characteristic

Table 2-2: AFE Characteristic

Parameter	Description	Min	Typ	Max	Unit	Conditions
T _{op}	Operating Temperature	-40	+25	+85	°C	
f _{op}	RF operating frequency		125		kHz	
f _{res}	Resonance frequency	122	125	128	kHz	T _{op} = +25°C
V _H	Clamp RF voltage level		8.3		V	
V _L	Modulating RF voltage level		2.4		V	
V _{RF,CMD}	Command reception level	3.0			V	
V _{RF,PROG}	Programming RF level	5.0			V	
C _{res}	Resonant capacitor		432		pF	V _H = 3V

Table 2-3: EEPROM Characteristic

Parameter	Description	Min	Typ	Max	Unit	Conditions
T _{ret}	EEPROM Data Retention	20			Years	T _{op} = +50°C
N _{cy}	EEPROM write cycles	100k			Cycles	T _{op} = +25°C

Table 2-4: Environment and Data Reliability

Parameter	Min	Typ	Max	Unit	Conditions
ESD	5			kV	MIL 883 3015.7 (Test 2times)
Vibration	2.5			Hrs.	IEC 68 part 2-6 (Test 10G,10-2000 kHz, 3-axis)
Drop	100			Times	Test 1.8m free fall
Shock	4000			Times	IEC 68 part 2-29 (Test 40G, 6ms, 3-axis)

3. Memory organization

3.1 EEPROM Organization

The SIC6146E memory has 4,096-bit and organizes into 16-block, which each block contains 8-page by each 32-bit. The memory sections are split into Transponder Memory (TM) – BLOCK 0, Extended User Memory (XM) – BLOCK 1 to BLOCK 14, and Configuration Memory (CM) – BLOCK 15.

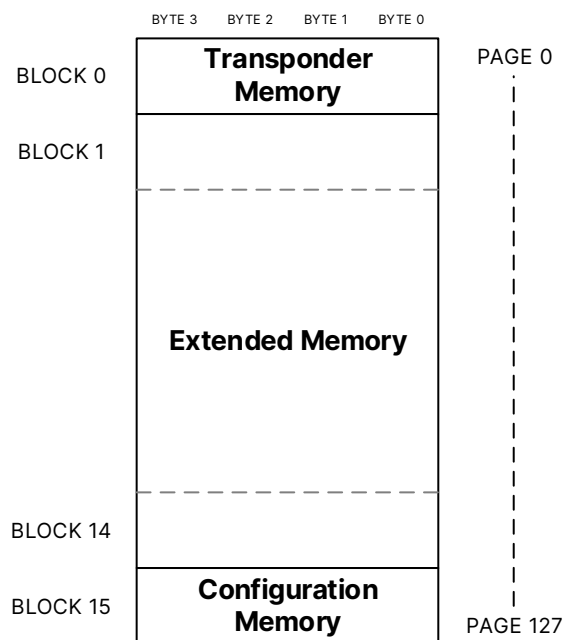


Figure 3-1: Memory Structure

4. Communication

The communication between a base station and a transponder consists of three phases:

- Initialization Phase (Base Station to Transponder)
- Downlink Mode (Base station to Transponder)
- Uplink Phase (Transponder to Base Station)

4.1 Initialization Phase (Base Station to Transponder)

This phase starts when a transponder is placed near the reader's RF field. The field burst charges up the transponder until there is enough energy level. The Power-On Reset signal is generated and asserted to reset the entire chip. During this phase, chip configuration bits in the memory are read and stored for later use by the digital controller. Then, the transponder stays idle and waits for commands from the reader.

4.2 Downlink Phase (Base Station to Transponder)

The reader sends commands to the transponder by turning the RF field OFF and ON with pre-defined intervals. The transponder converts those patterns into the command signal, and then sends them to the Digital Controller to translate the operation.

Data information is transmitted to the SIC6146E by an amplitude shift keying modulation with a modulation index of 100% (OOK encoding).

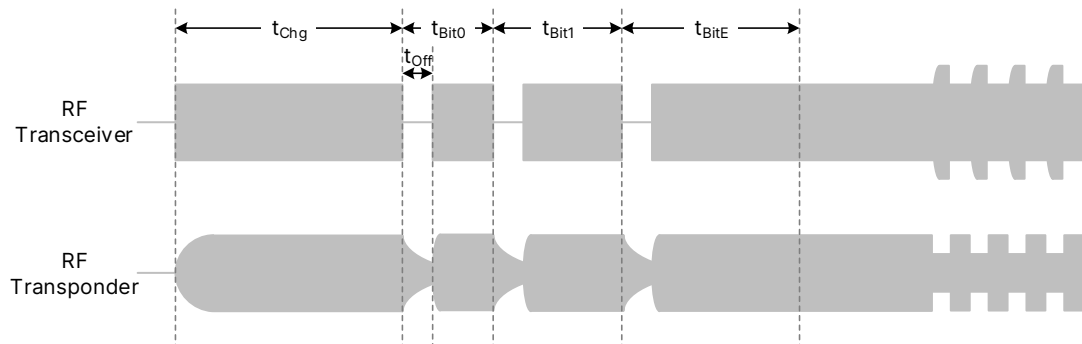


Figure 4-1: RF protocol of base station to transponder

Table 4-1: Downlink timing characteristic

Parameter	Description	Min	Typ	Max	Unit
t_{Chg}	Charge time (Charge)	532			Cycle
t_{Bit0}	Bit '0' duration (Command)	18	20	22	Cycle
t_{Bit1}	Bit '1' duration (Command)	26	29	32	Cycle
t_{BitE}	End bit duration (Command)	36			Cycle
t_{OffH}	Pulse-off bit	4	6	10	Cycle

Characteristic at operating frequency (f_{op}) 125 kHz

4.3 Uplink Phase (Transponder to Base Station)

During the uplink phase, the transponder transmits data back to the base station by using ASK modulation at a rate of $RF/32$. The response data bits '0' and '1' are encoded by the Manchester coding and Bi-Phase coding format, as illustrated in Figure 4-2.

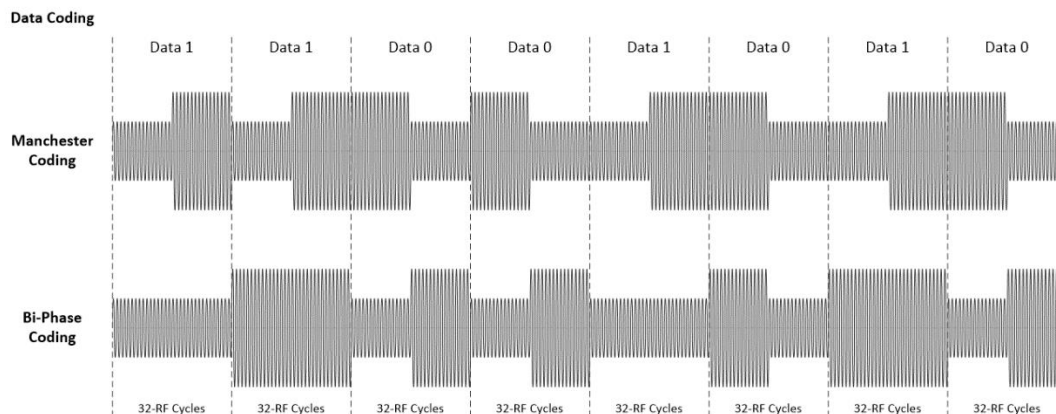


Figure 4-2: RF protocol of the transponder to the base station

Table 4-2: Uplink timing characteristic

Parameter	Description	Min	Typ	Max	Unit
Data 0, Data 1	Modulation data duration		32		Cycle

5. Package information

5.1 Wedge transponder

5.1.1 Wedge dimension

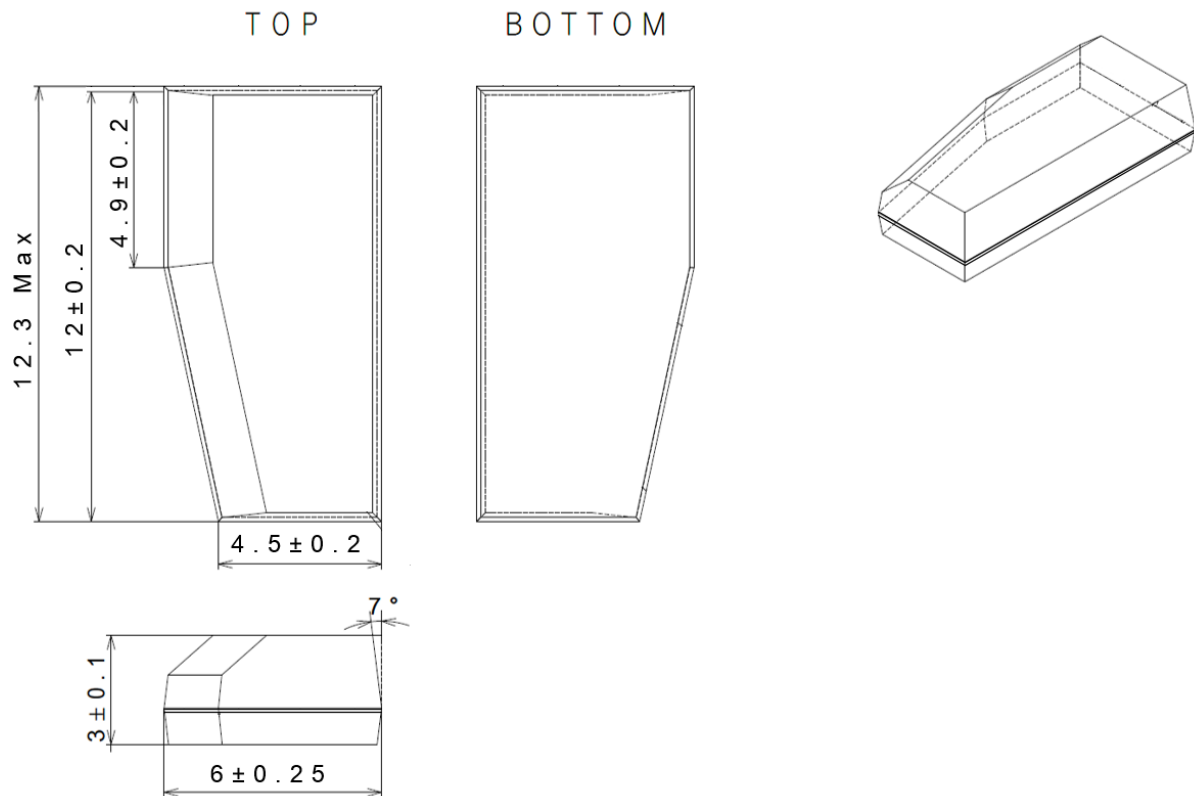


Figure 5-1: Wedge Drawing and dimension

6. Packing Specification



Figure 6-1: Product packing

Table 6-1: Canister information

Packing information	Value	Unit
Canister PVC dimension	ø116 x 128.5	mm
Product quantity per canister	2,000	ea.
Canister weight (Included product)	0.93	kg



Figure 6-2: Inner box dimension

Table 6-2: Inner box information

Packing information	Value	Unit
Inner box dimension (l x w x h)	255 x 255 x 180	mm
Canister quantity per inner box	4	ea.
Inner box weight (Included product)	3.96	kg



Figure 6-3: Outer box dimension

Table 6-3: Outer box standard packing information

Outer box standard	Outer box dimensions l x w x h (mm)	Total maximum weight (kg)	Inner box quantity
1	330 x 240 x 310	4.46	1
2	390 x 380 x 390	8.92	2
3	620 x 390 x 390	17.14	4

The outer box has three standard box sizes depending on the order.

7. Disclaimer

- The information described herein is subject to change without notice.
- Although the IC contains a static electricity protection circuit, static electricity or voltage that exceeds the limit of the protection circuit should not be applied.
- Silicon Craft Technology assumes no responsibility for the way in which this IC is used in products created using this IC or for the specifications of that product, nor does Silicon Craft Tech. Assume any responsibility for any infringement of patents or copyrights by products that include this IC either in Thailand or in other countries.
- Silicon Craft Technology is not responsible for any problems caused by circuits or diagrams described herein whose related industrial properties, patents, or other rights belong to third parties. The application circuit examples explain typical applications of the products, and do not guarantee the success of any specific mass-production design.
- Use of the information described herein for other purposes and/or reproduction or copying without the express permission of Silicon Craft Technology is strictly prohibited.
- The products described herein cannot be used as part of any device or equipment affecting the human body, such as exercise equipment, medical equipment, security systems, gas equipment, or any apparatus installed in airplanes and other vehicles, without prior written permission of Silicon Craft Technology.
- Although Silicon Craft Technology exerts the greatest possible effort to ensure high quality and reliability, the failure or malfunction of semiconductor products may occur. The user of these products should therefore give thorough consideration to safety design, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue.